


NR-5S

Manual operating mechanism

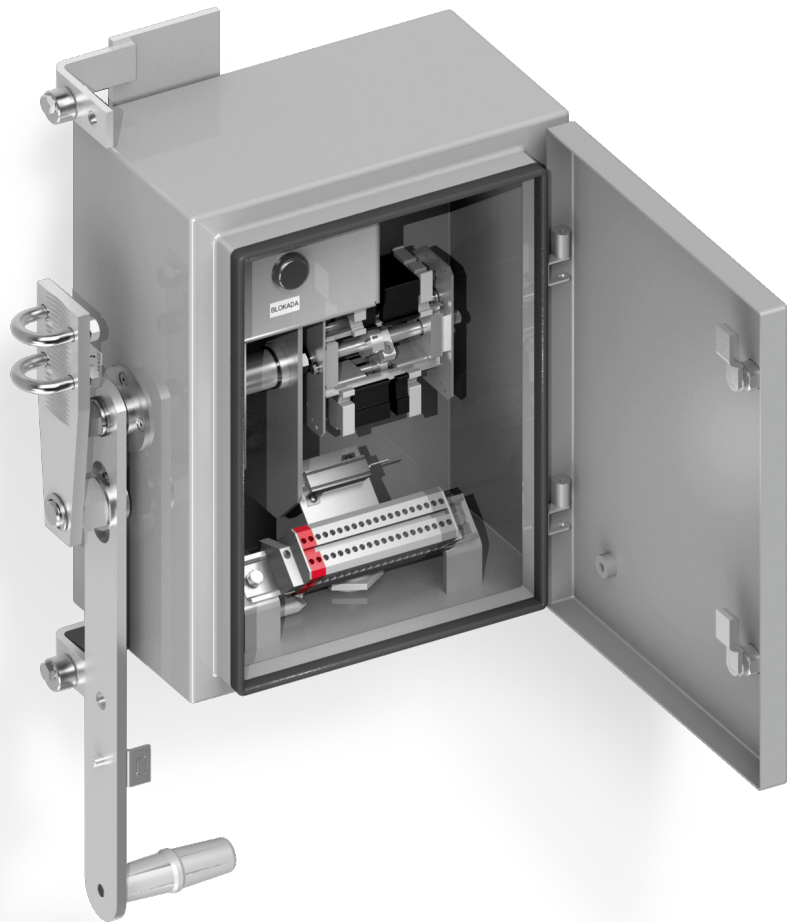

CHARACTERISTICS

- Excellent anti-corrosion protection
- Simple operating of MV disconnecter/switch disconnecter
- Extra blocking system with padlock available in limit positions
- Versions with auxiliary contacts, electromagnetic interlock and terminal block available
- Indefective working

SPECIFICATION

Item	Parameter	Value
1.	Rated torque	300 [N]
2.	Rated voltage: - electromagnetic lock	220 [VDC] 230 [VAC] 110 [VDC]
3.	Rated power: - elektromagnet coil – DC/AC start - elektromagnet coil – DC/AC operation	220 [W] / 700 [W] 1,5 [W] / 1,5 [W]
4.	Main shaft angular displacement	192 [°]
5.	Rated switching capability of control switch	AC-15; 230 [V]; 2,5 [A] DC-13; 220 [V]; 0,25 [A] DC-13; 110 [V]; 1 [A]
6.	Maximum conductor cross section	4 [mm ²]
7.	Enclosure protection rating	IP 55
8.	Rated mechanical strength	2000 cycles

DIAGRAMS

