


UWS

High current earthing switch

CHARACTERISTICS

- High performance parameters
- Very high short-circuit and peak current - up to 76/190kA
- Indefective working
- Possibility to adapt apparatus to clients' requirements
- Possibility to manuever with manual or motor operating mechanism
- Simple operation

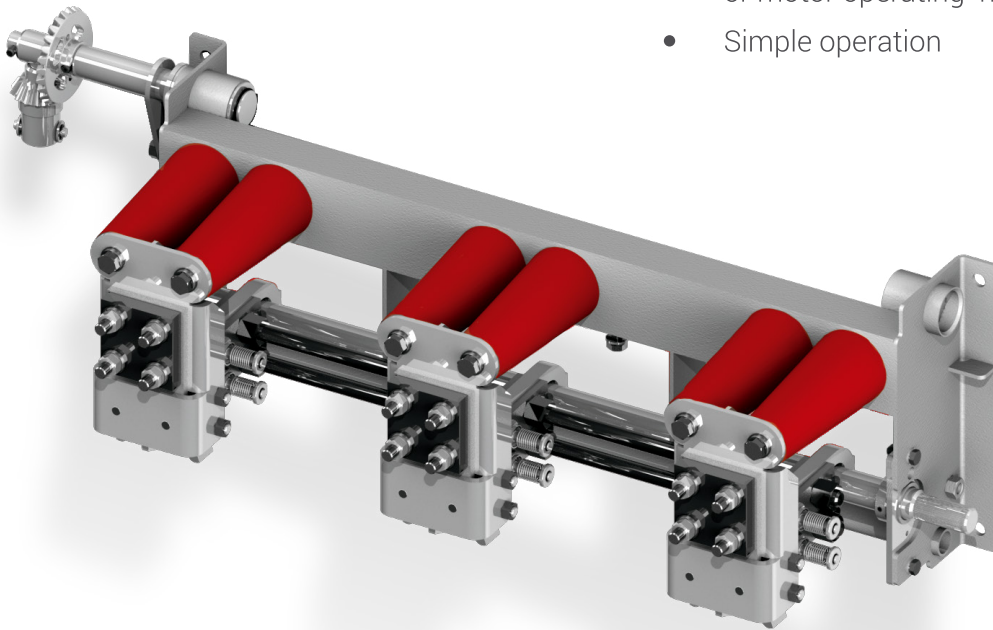

SPECIFICATION

Item	Parameter	Value	
		UWS-12	UWS-24
1.	Rated operating voltage	12 [kV]	24 [kV]
2.	Rated frequency	50/60 [Hz]	50/60 [Hz]
3.	Peak withstand current	160/190 [kA]	125 [kA]
4.	Rated short-time withstand current	65/76 [kA]	50 [kA]
5.	Test voltage (50Hz) for earth and pole to pole insulation	28/32 [kV]	50/60 [kV]
6.	Surge test voltage for earth and pole to pole insulation	75/85 [kV]	125/145 [kV]

SPECIFICATION

Earthing switch type	Dimensions [mm]				
	A	B	C	D	E
12 kV	844	300	311	312	397
24 kV	964	360	401	402	488

DIAGRAMS

